

SOFTLIGHT 2500

code 410



Specifications

Construction: Pressed aluminum
Black epoxy anti-scratch finish on outside
High temperature matt white on inside
Extra-pure aluminum reflector for each lamp; Diffusing finish
Lampholder R7s
Fitting lamps 625w P2/10, 1000w P2/7 and 1250w P2/12 (3200°k)
Rotating lamp bar with tilt lock for a double use for the luminaire as a Soft (indirect) or Broad (direct) light source
Aluminum yoke with 1-1/8" (29 mm.) spigot
Cable lenght 4m. section 3x2,5 mmq Titanex HAR H07 RN
Supplied with integral wire guard for each lamp.
Independent switching for each lamp.
Weight M.O. 8,7 kgs. - P.O. 9,8 kgs.




Accessories

Cod. 411: 1,250 gr. Filter holder

Photometrics

DISTANCE 5 m (2500w - P2/10)	HORIZ. AXIS	VERT. AXIS
light center value	460	460
beam angle= beam at 50% peak value	104°	92°
field angle= beam at 10% peak value	151°	141°

Fitting 2 halogen lamp with R7s base.

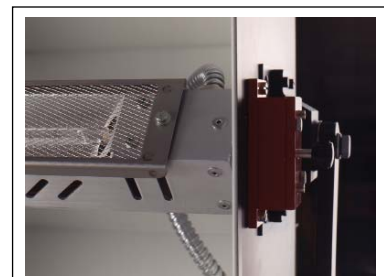

Revolving Bar



Switches panel
(Independent switching for each lamp.)



Pole operated