

# SOFTLIGHT 5000



code 400

## Specifications

Construction: Pressed aluminium  
Black epoxy anti-scratch finish on outside  
High temperature matt white on inside  
Extra-pure aluminum reflector for each lamp; Diffusing finish  
Lampholder R7s  
Fitting lamps 625w P2/10, 1000w P2/7 and 1250w P2/12 (3200°k).  
Rotating lamp bar with tilt lock for a double use for the luminaire as a soft (indirect) or Broad (direct) light source  
Aluminum yoke with 1-1/8" (29 mm.) spigot  
Cable lenght 4m. Section 3x6 mmq Titanex HAR H07 RN  
Supplied with integral wire guard for each lamp  
Independent switching for each lamp  
Weight M.O. 11,4 kgs. P.O. 14,3 kgs




## Accessories

**Cod. 401:** 1,250 gr. Filter holder

## Photometrics

DISTANCE 5 m (2500w - P2/10)	HORIZ. AXIS	VERT. AXIS
light center value	660	660
beam angle= beam at 50% peak value	104°	107°
field angle= beam at 10% peak value	152°	170°

Fitting 4 halogen lamp with R7s base.

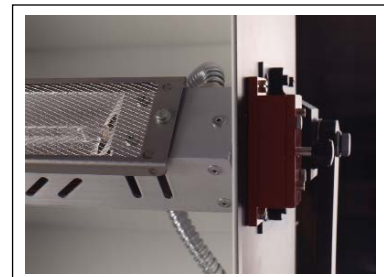

Revolving Bar



Switches panel  
(Independent switching for each lamp.)



Pole operated